
## UNIQUE

XTRATUFF VICES

UNIQUE PRECISION COMPACT LOCK MACHINE VICE
CODE NO. U 350 P

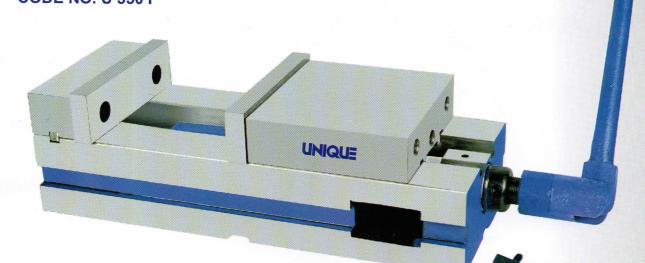

## **FEATURES**

- This vice can be clamped vertical or either side.
- High clamping force can be achieve by effortless handle movement which eliminates hammering on handle.
- Hardened jaws maintain accuracy for long time.
- Enhanced body Structure reduces the deflection in operation while the vice mounted vertical or horizontal.
- Ductile iron body.
- Sealed bearing system reduces clamping pressure and increases bearing life.
- Accuracy in parallelism & squareness with in 0.02/100mm
- No work piece tilt after clamping.
- All parts are interchangeable
- Tenon and tenon slots provided for effortless truing of vice.
- SUPPLIED WITH STOPPER FOR FAST PRODUCTION


### **SPECIFICATIONS**

	SIZE IN INCHES	6
	Width of jaws in mm	150
	Max. Opening with standard jaw position	200
	Max. jaw opening with jaw reversed	430
	Depth of jaws in mm	45
	Overall length in mm	515
1	Overall height in mm	125
	Nett weight in kgs	35
	Tenon slot size in mm	20



# UNIQUE XTRATUFF VICES

UNIQUE ANGLE LOCK SELF CENTERING VICE CODE NO. U 350 SCV

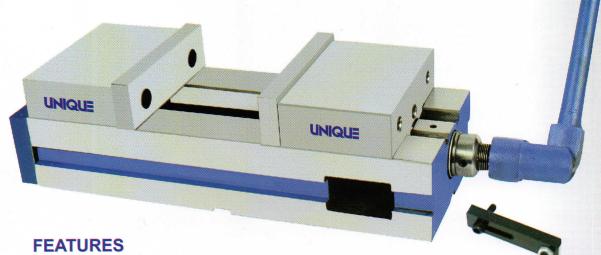

- This vice can be clamped vertical or either side.
- High clamping force can be achieve by effortless handle movement which eliminates hammering on handle.
- Hardened jaws maintain accuracy for long time.
- Enhanced body Structure reduces the deflection in operation while the vice mounted vertical or horizontal.
- Ductile iron body.
- Sealed bearing system reduces clamping pressure and increases bearing life.
- Accuracy in parallelism & squareness with in 0.02/100mm
- No work piece tilt after clamping.
- All parts are interchangeable
- Tenon and tenon slots provided for effortless truing of vice.
- SUPPLIED WITH STOPPER FOR FAST PRODUCTION

### **SPECIFICATIONS**

SIZE IN INCHES	6
Width of jaws in mm	150
Max. Opening with standard jaw position	200
Max. jaw opening with jaw reversed	430
Depth of jaws in mm	45
Overall length in mm	490
Overall height in mm	125
Nett weight in kgs	36
Tenon slot size in mm	20

